

Step By Step Assembly Instructions 2005 Model XG-499 Gas Scooter


Attach footplate to frame

Using the 4 bolts, rubber washers and nuts, attach the footplate to the frame placing the rubber washers between the frame and footplate.



Attach frame to motor/rear frame.

Having a second person hold the motor/rear frame slightly off the ground, insert the enclosed bolt thru the holes on the side of the rear frame and into the tube on the front frame. Securely tighten the nuts on each end.

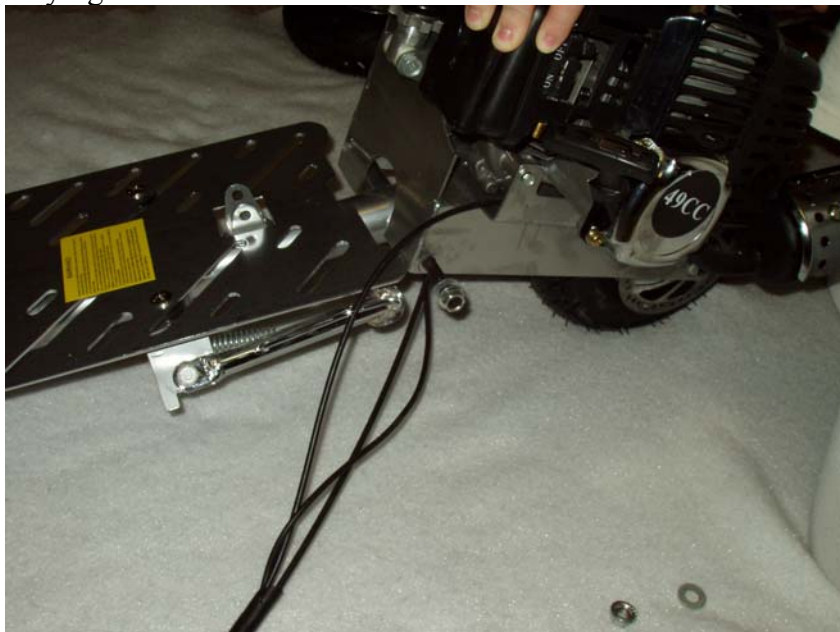

Attach the rear mono shock to the front frame.

Using the enclosed bolt and nut, insert the shock into the bracket on the footplate. Secure in place by tightening the nut.



Attach the front wheel.

Attach the front wheel by using the enclosed axle. The two large black spacers should be between the fork and wheel. Secure the wheel by tightening the nuts.



Attach the handlebars.

Remove the pin bolt and screw from the handlebars and set aside.



Slide the clamp onto the handlebars and then slip the handle bar over the post.



Align the handlebars correctly and then re-insert the pin bolt and screw into the handlebar post. This will keep the handlebars in line with the wheel. Tighten the clamp securely.



Attach the seat post and seat.

Your scooter comes with 2 seat posts. One is inserted into the bottom of the seat and secured by tightening the nuts.



The second seat post is inserted into the opening on the rear/motor frame. Tighten the post in place by using the enclosed allen wrench.




Slide the seat post clamp over the bottom post and insert the upper seat post and attached seat in the bottom post and secure in place by tightening the clamp. You can adjust the height easily by loosening the clamp and pulling up or down on the seat, then tighten the clamp.




Attach the gas tank.

Using the two enclosed bolts and nuts, attach the gas tank to the right side of the rear frame. Run the gas lines around the frame to the engine by gently tucking them under the rear fender.

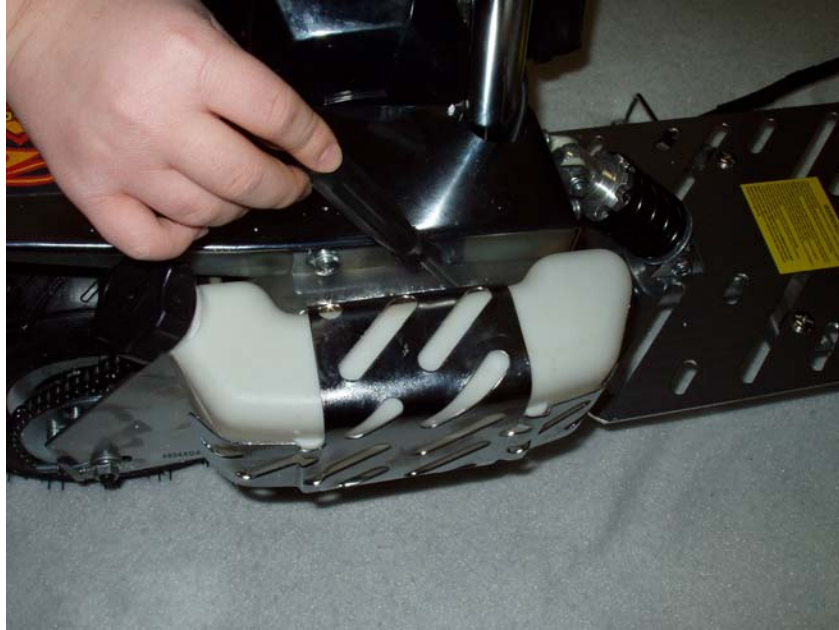

Attach the gas lines to the engine.

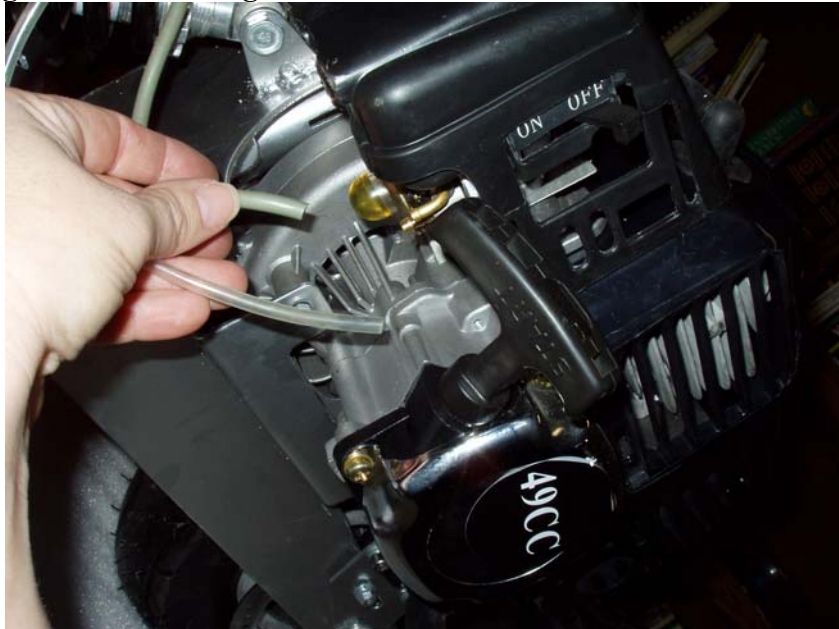

Use the enclosed zip ties to secure the wiring under the footplate to the frame to avoid damage to the wires.

We want you to enjoy your experience on your new X-Treme Scooter. If you have any questions that need to be answered by phone, do not call the company you bought your scooter from, instead call the technical support department Monday – Friday 9AM – 5PM CST at 1-702-952-0542 or send them an e-mail to support@x-tremescooters.com and leave them a short note with your questions or problem and someone will get back to you during business hours by phone or e-mail.